

VERSO® PRODUCT DATA SHEET

PRODUCT CODE

VCP106C


PRODUCT RANGE

Circuit Protection Miniature Circuit Breaker

DESCRIPTION

Single Pole 6A 6kA C Curve MCB

FEATURES

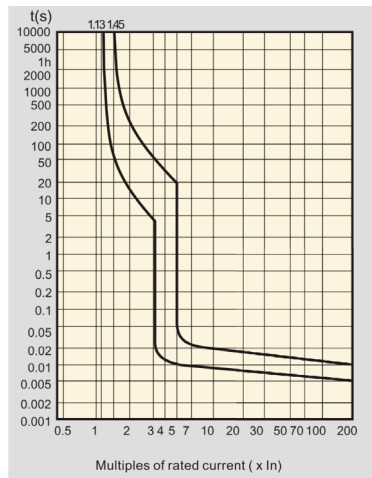

TECHNICAL INFORMATION

| | |
|----------------------------------|-----------------------------|
| Height | 86.5mm |
| Width | 17.8mm |
| Depth | 50mm |
| Weight | 0.168 Kg |
| Short Circuit rating | 6kA |
| Torque settings (out) | 1.2Nm |
| Torque settings (In) | 2.0Nm |
| Ambient temperature | -5 to +55 C |
| Integral MCB Type | C Curve |
| Number of Poles | Single Pole |
| Mounting type | Din Rail |
| Guarantee | 10 Years |
| Frequency | 50/60Hz |
| Current Rating | 6A |
| Cable Clamp type | Sqaure cage clamp mechanism |
| Rated operating voltage | 230/240 AC |
| Number of modules | One |
| IP Rating | IP2X |
| Packaging type | Box of 12 |
| Operating characteristic | Type AC |
| Rated residual operating current | N/A |
| Lockable | Yes |
| Standards | EN 60898-1 |
| Certified Independantly by | DEKRA |
| Country of origin | PRC |

VERSO® DECLARATION OF CONFORMITY

PRODUCT CODE

VCP106C

DESCRIPTION

Single Pole 6A 6kA C Curve MCB

INTENDED USE

To protect against overload and short circuit

MANUFACTURER

Verso® Electrical
PGL House (Floor 1), West Point Industrial
Estate. Penarth Road. Cardiff. CF11 8JQ.
United Kingdom



RATINGS & CHARACTERISTICS

| | |
|----------------|---------|
| Voltage Rating | 230V AC |
| Current Rating | 6A |
| Frequency | 50 Hz |

DESIGNATED STANDARDS

EN 60898-1,
IEC 60898-1



I declare that the object of the declaration above is in conformity with the relevant harmonization legislation and national standards.

Signed on behalf of Verso® Electrical

William Winter (Ba/Bsc) | Managing Director