

DBS Range

125A TP&N Distribution Board (Surge Compatible) Datasheet



CONSTRUCTION AND FEATURES:


- 4 pole, 125A isolator included - isolates all phases and neutral
- Surge compatible (SPD sold separately)
- Up to 18 three phase ways
- Solid steel design, 1.2mm
- Durable paint finish
- Lockable door with key
- 4 key hole type mounting holes
- Single phasing kit available (offers up to 54 single phase ways)

TECHNICAL DATA:

- Voltage rating: 400-415V AC, 50/60Hz
- Current rating: 125A, 3 phase
- Isolator: 125A, 4 pole
- Available sizes: 4, 6, 8, 10, 12, 14, 16 & 18 (3 phase ways)
- IP30
- For use with:
 - MC 6kA MCBs
 - MH 10kA MCBs
 - ROSB 10kA RCBOS
 - Type 1+2 and Type 2 SPDs
- Conforms to: BS EN 61439-3
- 18th Edition compliant



DIMENSIONAL SKETCH:

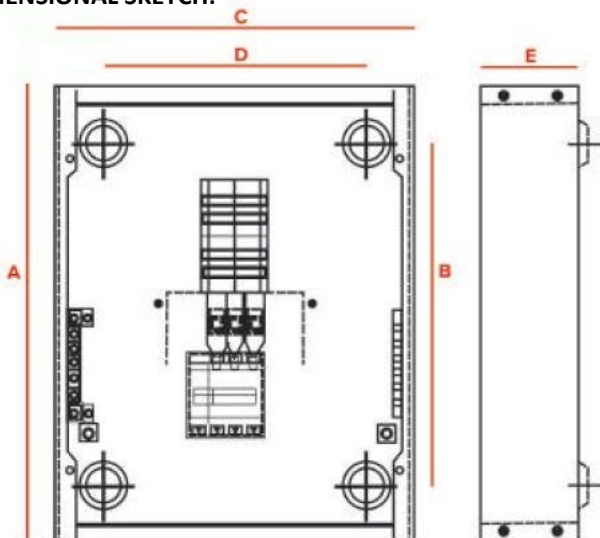

**NOTE: COVER PAN ASSEMBLY
WHEN DRILLING GLAND HOLES**

	A	B	C	D	E	WEIGHT (Kg) Approx.
DB04/125S	450	350	450	335	98	10
DB06/125S	504	394	450	335	98	11.2
DB08/125S	558	448	450	335	98	12.4
DB10/125S	612	502	450	335	98	13.7
DB12/125S	666	556	450	335	98	14.7
DB14/125S	720	610	450	335	98	15.8
DB16/125S	774	664	450	335	98	17
DB18/125S	828	718	450	335	98	17.9

